



CTVR SERIES:- PIZZA PREP TABLE



FEATURES:

- Designed to 40° C ambient operating temperature.
- 2 Years warranty
- Only requires one standard power point (GPO):- 240V 50Hz 10 amp.
- 2 height adjustable shelves per door. Individual shelves behind each door maximize storage configurations.
- Stainless steel construction for superior corrosion resistance.
- Stainless steel internal floor with coved corners allows for easy cleaning and sanitizing.
- Solid Doors. Designed with recessed handle and self closing hinging with 90° dwell feature.
- One piece door gaskets, removable without tools for easy cleaning.
- Automatic energy efficient hot gas condensate disposal. No drainage required.

		Ī
JR18-3		
	IR18-3	

Specifications are subject to change without notice. E&OE.

MAIN DATA Specifications are subject to change without no									
Model	Temp	Doors	Volume (L)	Shelves	Dimensions W x D* x H** (mm)	Power 220v 50Hz	Amps	Compressor (Hp)	Shipping Weight
CTPR-44SD	1-8°C	1	396	2	1119w x 820d x 1069h	366w	3.2	1/3	140
CTPR-67SD	1-8°C	2	566	4	1704w x 820d x 1069h	660w	3.8	7/16	187
CTPR-93SD	1-8°C	3	878	6	2364w x 820d x 1069h	660w	4.2	7/16	262

*Depth does not include 75mm for cutting boards and 25mm for rear spacers. **Height with Pan Covers closed.

Head Office: Unit 1/35 Rimfire Drive, Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572 Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com



AUTHORIZED DISTRIBUTOR



CTVR SERIES:- PIZZA PREP TABLE

Specification

- Cold Air curtain System: Our innovative forced air system allows cold air to flow all around the food pan area, covering not only underneath the pan, but also to the front, top and the rear. This unique air flow creates a cold air-shield around the pan, which maintains the food temperature under 5°C (NSF requirement) even when the lids are opened.
- Construction: The Turbo Air cabinet boasts a stainless steel interior and exterior (galvanized steel back and bottom). It guarantees the utmost in cleanliness and long product life.
- Sturdy, Clean Stainless Steel Shelving: Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air Super Deluxe series uniquely provides stainless steel shelving.

Extra Deep Cutting Board

Our cutting board is 489mm deep and 12mm thick to provide ample working space, and is made of easy to use and sanitize LDPE (Low Density Polyethylene). The new side rail cutting


board bracket makes it easy to secure and remove the cutting board.


- Side mount compressor unit: By positioning the compressor on the side of the unit, refrigerators can now be serviced without being moved. Our innovative, front breathing feature also allows this model to provide high efficiency in narrow spaces.
- Insulated Pan Cover
- Hot Gas Condensate System: Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water
- Efficient Refrigeration system: Turbo Air M series refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.
- Shelves: 1 adjustable, heavy duty, PE


(polyethylene) coated, wire shelve per door.

- High-tech Monitor: The monitor digitally displays the present temperature. You can easily change the temperature by adjusting the thermostat.
- Insulation: high density polyurethane foam, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties.
- Ergonomically Designed Doors: Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.
- Magnetic Door Gaskets: Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.
- Electrical: Units come ready for connection to 220volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.
- Warranty¹: Manufacturers warranty 24 month parts and labour.

ELEVATIONS. (not to scale)

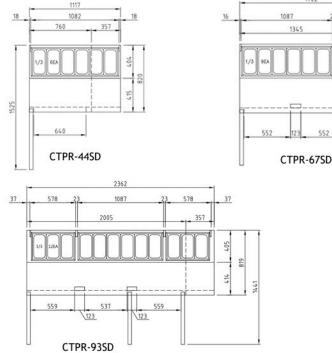



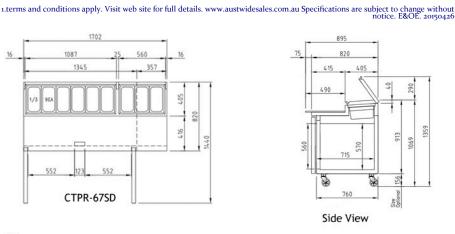

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572 Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com