

**BACK BAR REFRIGERATOR: TB6-1G**



**BLACK**



**SUS**

**FEATURES / BENEFITS**

■ **HOT GAS CONDENSATE SYSTEM**

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

■ **EFFICIENT REFRIGERATION SYSTEM**

Turbo Air's refrigerators are designed with oversized and balanced refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

■ **FORCED AIR COOLING SYSTEM**

Fast cooling and balanced temperature throughout the cabinet.

■ **LED INTERIOR LIGHTING FOR ALL MODELS**

Bright LED interior lighting is specifically designed for perfect visibility throughout the interior.

■ **MAGNETIC DOOR GASKETS**

Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.

■ **HIGH-DENSITY POLYURETHANE INSULATION**

The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.

■ **ADJUSTABLE, HEAVY DUTY, STAINLESS STEEL PLATES FOR SHELVING**

■ **ERGONOMICALLY DESIGNED DOORS**

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

■ **FRONT BREATHING SYSTEM**

Our innovative, front breathing feature also allows this model to provide high efficiency in narrow spaces.

Model	Swing Door	Capacity (litres)	#of Shelves	HP	AMPS	Crated Weight (kg)	W x D x H (mm)
TB6-1G(900)	1	125	2	1/4	2.5	60	660 x 550 x 900
TB6-1G(800)	1	110	2	1/4	2.5	55	660 x 550 x 800

## BACK BAR REFRIGERATOR: TB6-1G

### Model : TB6-1G

SPEC SHEET	TB6-1G
Classification	Refrigerator
Cabinet dimension (WxDxH mm)	660x550x900(800)
Capacity (Liters)	125      110
Inner Temperature	1°C ~ 8°C
Ambient Temperature	40°C
Doors	1
# of shelves	2
Refrigerant	R-134a
Compressor (HP)	1/4
Cooling Type	Fan cooling type
Insulation Type	Polyurethane/ Cyclopentane+CFC Free
Temperature Control Type	Digital
Amps (A)	2.5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph
Power (W)	190
Weight (Kg)	60      55

Design and specifications subject to change without notice.  
Actual shipping weight may differ due to extra packing materials for product protection.

- DOOR LOCKS STANDARD
- SELF-CONTAINED SYSTEM
- 800MM HEIGHT AVAILABLE

**WARRANTY** **2 YEARS**  
PARTS & LABOUR


Ver.DEC.2015

### PLAN VIEW


(unit : mm)



TOP VIEW

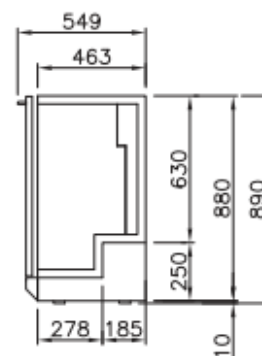

SIDE VIEW  
(900mm)

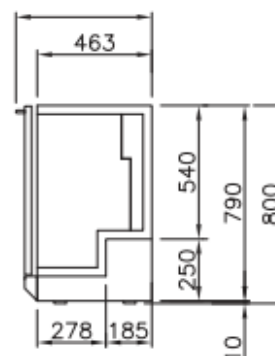

SIDE VIEW  
(800mm)

